

## **AFTERCARE INSTRUCTIONS**

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

## **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

**NOTE:** The 5 year guarantee on the valves is invalidated if damaged by any waterborne debris.

**In the interests of continuous product development Bristan reserve the right to alter specification as necessary**

**PRODUCT CODE: DS SNK C**

**TELEPHONE HELP LINE: 0844 701 6273**

Bristan Group Ltd  
Birch Coppice Business Park  
Dordon  
Tamworth  
Staffordshire  
B78 1SG  
UK  
A Masco Company

Web Site: [www.bristan.com](http://www.bristan.com)  
Telephone: 0844 701 6274  
Facsimile: 0844 701 6275  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)

(FI DS SNK)

(REV D3)

# **BRISTAN**

## **Disco Dual Flow Monobloc Sink Mixer**

## **Fitting Instructions & Contents List**

**Please keep these instructions for future reference  
and request of replacement parts.**

## WATER PRESSURE


This mixer is suitable for use at all supply pressures. If the fitting is installed at low pressure (tank fed), then the minimum height from the outlet of the nozzle to the underside of the cold tank should be 2.0 metres to ensure adequate performance.

**Operating Pressures: Min 0.2 bar, Max 7.0 bar.**

This mixer should be installed in compliance with Water Regulations. For further details contact your Local Water Authority.


## CONTENTS

1. Sink Mixer (x1)
2. Full Rubber Washer (x1)
3. C-shaped Rubber Washer (x1)
4. C-shaped Metal Washer (x1)
5. Copper Tails (x2)
6. Retainer (x1)
7. Threaded Rod (x1)

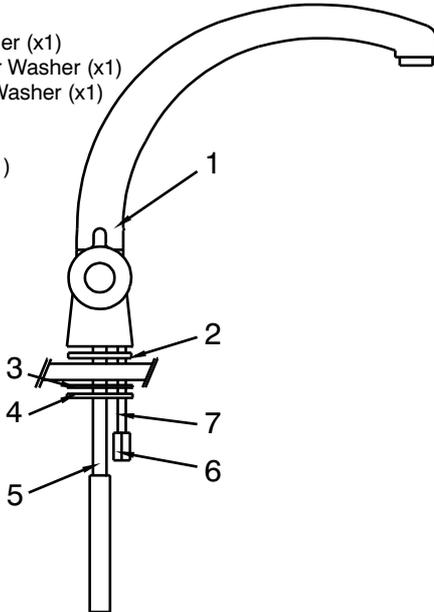

## INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit the mixer (1) to the sink using the 'C' plate fixing kit. The full rubber washer (2) goes between the fitting and the sink, and the 'C' shaped rubber (3) and metal washers (4) on the underside of the sink. Secure using the nut (6) and threaded rod (7)
3. Fit the tail pipes (5) to the fitting then connect the hot and cold supplies.
4. Fully open both valves, letting it run for a few minutes to check all joints and connections for leaks.
5. See over the page for aftercare instructions.

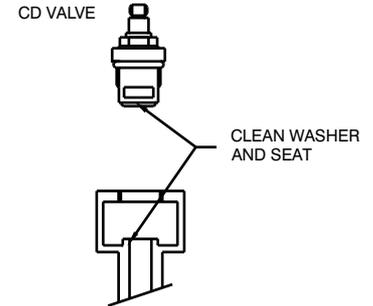

## MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Prise out handle cap and loosen screw. Remove handle and valve.
3. Carefully clean seating, rubber washer and ceramic disc.
4. Replace valve, handle and then turn on the water supply.
5. Contact our helpline if problem persists.

### **Please Note: -**

In the unlikely event you find a part missing please contact our Customer Service Help line on 0844 701 6273 or email [enquire@bristan.com](mailto:enquire@bristan.com) for immediate dispatch of part.